

DATA SHEET

CuCrZr

**SHENZHEN ADDIREEN TECHNOLOGIES CO., LTD**

Highly Reflective Metals

Refractory Metals

Common Metals


CuCrZr

Overview

Gas atomized--Copper alloy exhibits excellent thermal and electrical conductivity at high temperatures, with superior high - temp mechanical properties.

Highlights

- ⚙ Mechanical properties superior to pure copper , but moderate to high conductivity.
- 🔧 Suitable for thick-layer printing

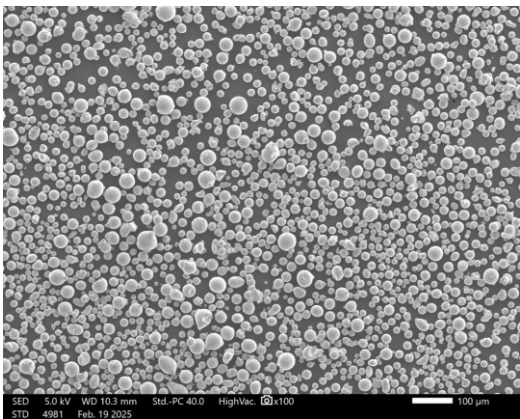

MATERIAL PARAMETERS			
Particle Size	Flowability	Apparent Density	Oxygen Content
15-53μm	≤20s/50g	≥4.2g/cm ³	≤300ppm




CHEMICAL COMPOSITION IN WT%			
Item		Specification	
Essential Elements(wt%)	Cu	Balance	
	Cr	0.5-1.5	
	Zr	0.05-0.25	
Impurities(wt%)	O	≤0.06	
	Fe	≤0.05	
	Si	≤0.05	
	P	≤0.01	
Laser Particle Size Distribution(%)	D10(μm)	15-25	
	D50(μm)	30-40	
	D90(μm)	45-60	
TYPICAL PART PROPERTIES			
Density (%)	Tensile Strength R _m (MPa)	Yield Strength R _{p0.2} (MPa)	Elongation to Failure A(%)
99.98%	510MPa	410MPa	20%

Data tested on Addireen XH-M160 green laser test bar.

Typical Applications

Thrust chamber | Induction coils | Connectors

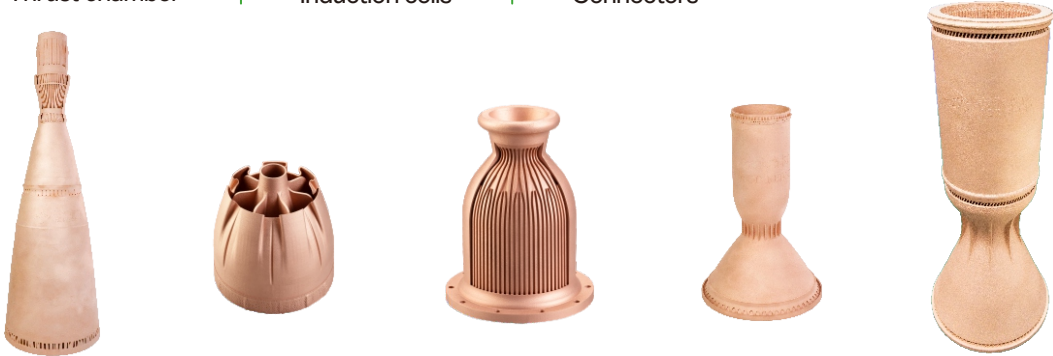

alphacam GmbH
Erlenwiesen 16
D-73614 Schorndorf
Tel.: +49 (0) 71 81 92 22 - 0
info@alphacam.de

alphacam austria GmbH
Handelskai 92, Gate1 / 2. OG / Top A
A-1200 Wien
Tel.: +43 (0) 1 36 19 600 - 0
info@alphacam.at

alphacam swiss GmbH
Zürcherstrasse 14
CH-8400 Winterthur
Tel.: +41 (0) 52 - 262 07 - 50
info@alphacam.ch



alphacam.de
.at
.ch